

DGT 5810-11

Touch screen Dispatch console with DGT DCA application



Efficient and convenient call handling

Clear visualization of the supported links and performed operations statuses

Integration of telephone, radio and satellite communication, LTE and other services

Built-in, mechanically retractable camera

The dispatch console with the DCA dispatch application (Dispatch Console Application) allows the user to access telephone, radio and other functionalities, implemented by the DGT MCS system.


DGT touch screen dispatch consoles were created in order to increase the comfort of use and facilitate the user's work. Thanks to the increased readability (large LCD panel), intuitive and convenient operation (touch screen), using the console is simple and user friendly. The devices are designed for continuous operation in various communication systems. No rotating elements guarantees comfortable operation (noise level 0dB). The highest quality displays with excellent performance parameters allow you to work both in very well-lit rooms and at night when the lighting is limited. The device is a work tool with a very high level of reliability.

Additionally, the console can also be equipped with a DESKSTAND microphone (external desk microphone with one, four or eight PTT buttons), a wired or wireless headset and a PTT footswitch.

DGT DCA Application

The DGT DCA (Dispatch Console Application) application is the universal user interface of the DGT MCS system. It enables the implementation of advanced telephone and radio functionalities (UHF /VHF, DMR, dPMR, NXDN, TETRA) and video stream support within DGT PTT Connect.

Below are some exemplary application screenshots.

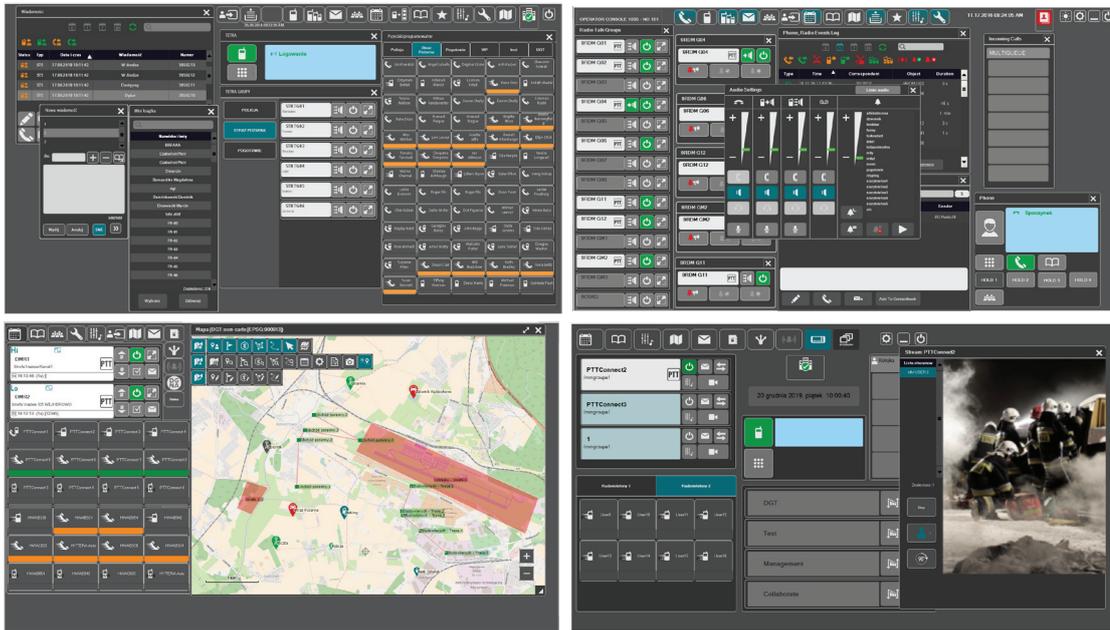

Mechanically retractable camera


The DGT 5810-11 dispatch console has a built-in, mechanically retractable camera.



Selected features

- IPS touch (capacitive) display, Full HD, 23.5" 16:9
- Three support points to reduce screen shake during selecting functions on the screen
- The adjustable console tilt angle, in a range from 3° to 20°
- Six independent audio tracks outputted to the built-in speakers
- Possibility of connecting a gooseneck type microphone
- The headset connector
- The DESKSTAND type microphone connector
- The PTT footswitch connector
- Optional LED backlight
- Two color versions (white and black)
- 12VDC power supply (equipped with an external 230VAC / 12VDC power adapter)

5810-11 Console and 5810-12 Workstation create a complete position for access to the communication means and Command Support System software.

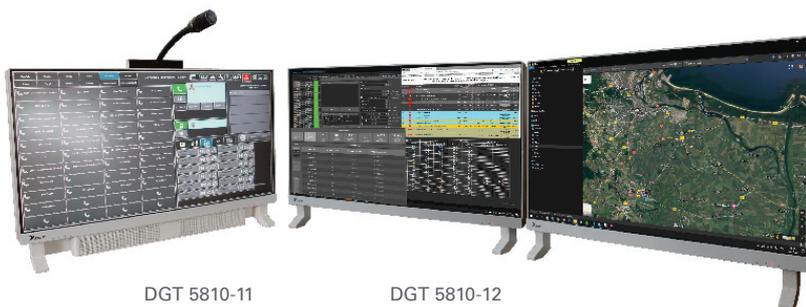

DGT 5810-11

DGT 5810-12

DGT



DGT Sp. z o.o.
ul. Młyńska 7, 83-010 Straszyn
tel.: +4858 682 07 00, fax: +4858 683 29 25